


NORSLO



CABLE TERMINATION


Connectors

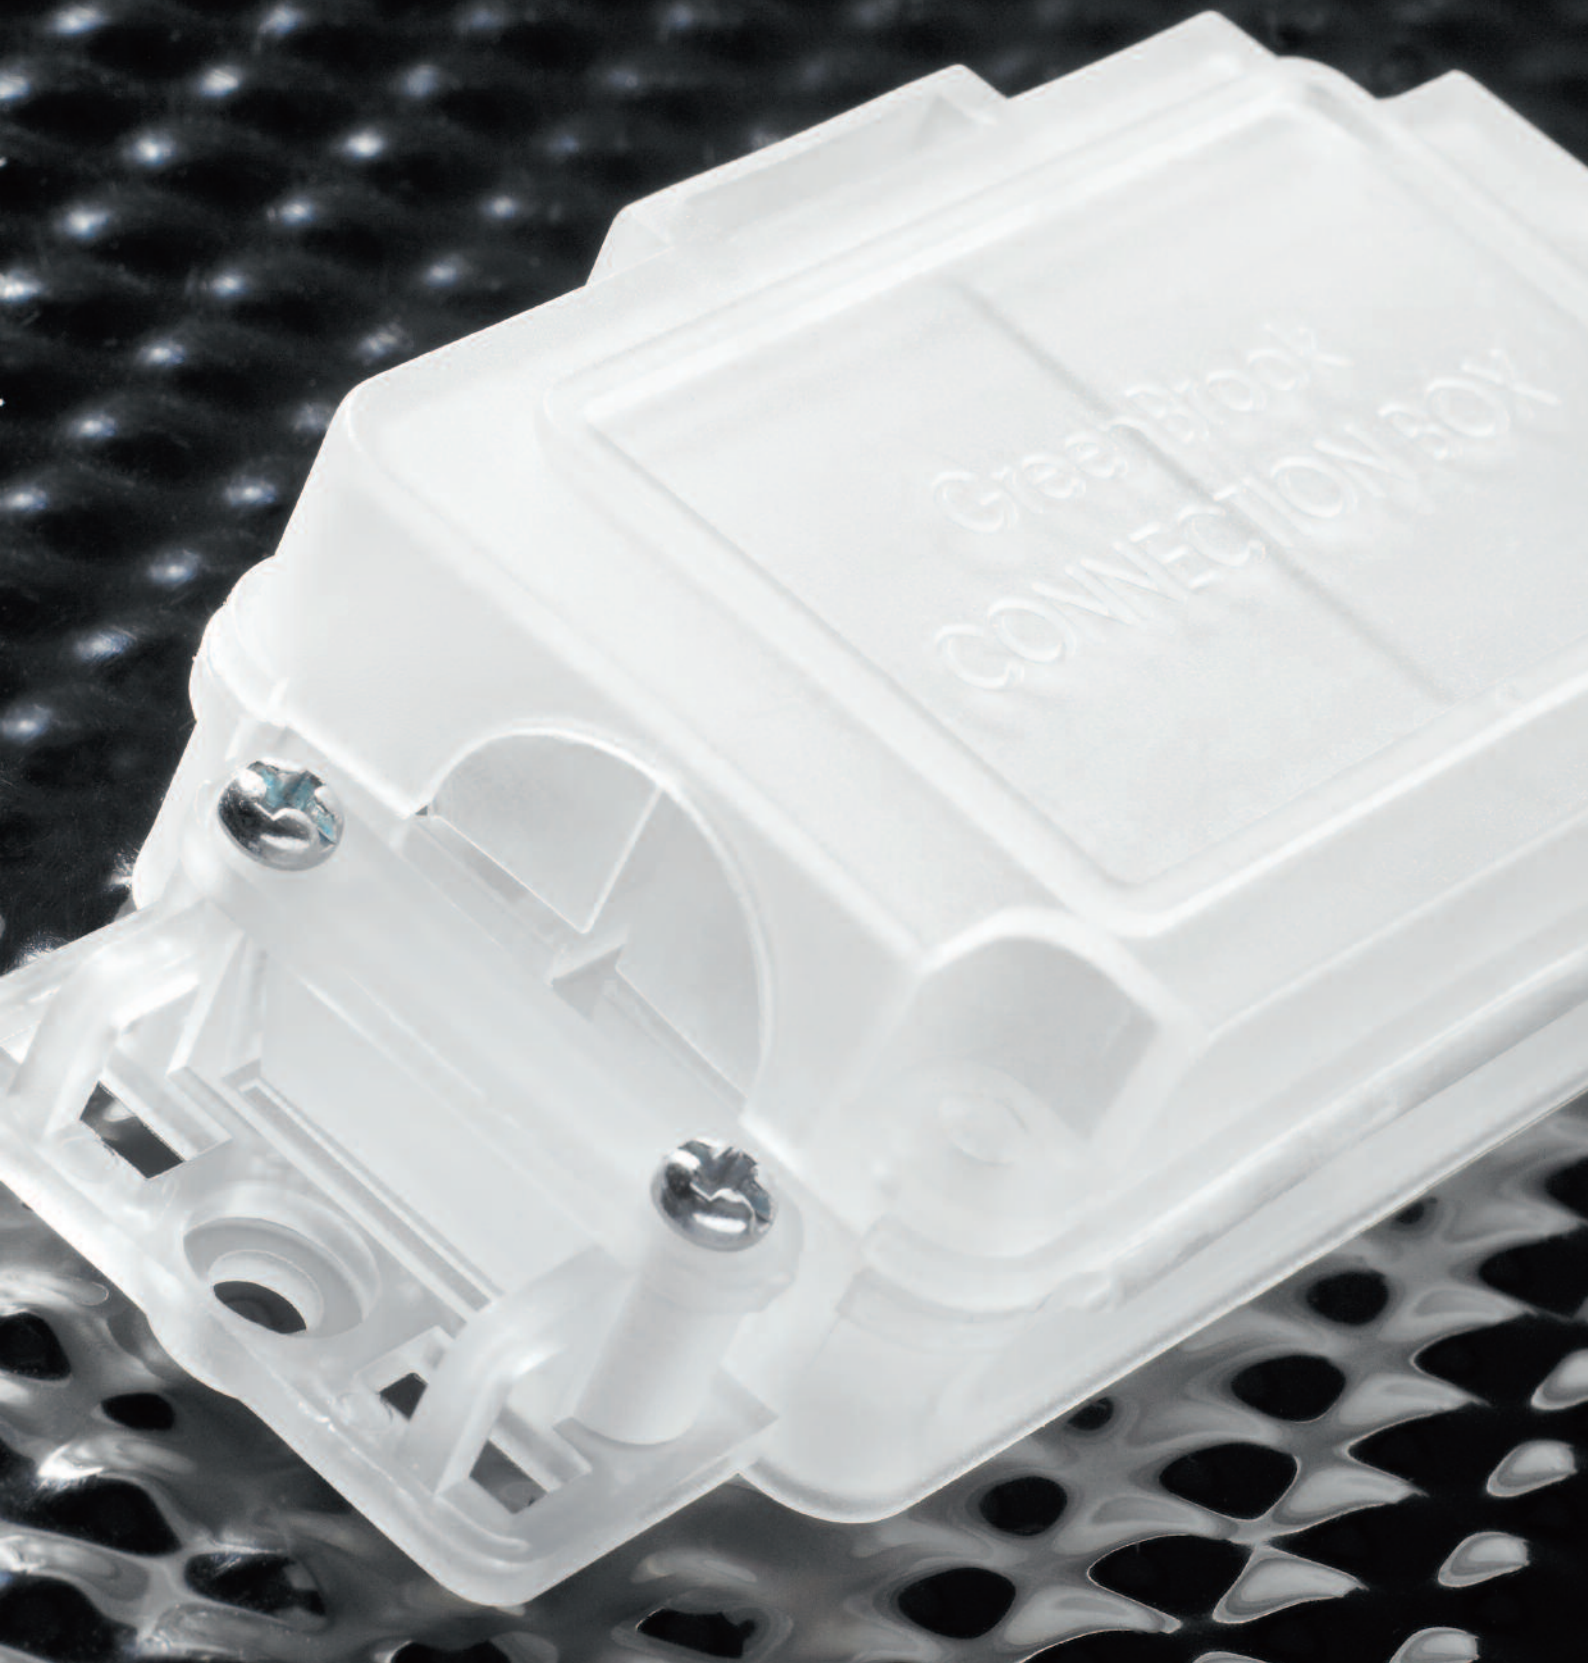

- Brass terminals
- Ceramic body
- Max temperature of operation: 350°C
- Chemical resistant
- 2 and 3 pole complete with central hole fixing

	PART NO.	DESCRIPTION	POLES	PK QTY	DIMENSIONS	FIX HOLES
	PC51	5A	1 pole	20	H15 x W18 x L11mm	0
	PCC52	Porcelain	2 Pole	20	H15 x W18 x L33mm	2 - 4mm
	PCC53	Connectors	3 pole	20	H15 x W18 x L23mm	1 - 4mm
	PCC152	15A	2 pole	20	H15 x W23 x L26mm	1 - 5mm
	PCC153	Porcelain	3 pole	20	H15 x W23 x L40mm	2 - 5mm
	PC301	30A	1 pole	20	H19 x W26 x L16mm	0
	PCC302	Porcelain	2 pole	20	H19 x W26 x L32mm	1 - 5mm
	PCC303	Connectors	3 pole	20	H19 x W26 x L47mm	2 - 5mm

- Polyethylene working temperature 80°C
- Nylon working temperature 100°C
- Bakelite working temperature 140°C

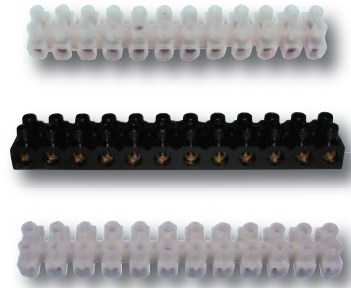

PART NO.	DESCRIPTION	AMPS	PK QTY	
2SC	Polyethylene 12 way Strip Connectors Clear	3A	10	
5SC		5A	10	
10SC		10A	10	
15SC		15A	10	
30SC		30A	10	
60SC		60A	10	
NYC5	Nylon 12 way Strip Connectors Clear	5A	10	
NYC15		15A	10	
NYC30		30A	10	
BAC5	Bakelite 12 way Strip Connectors Black	5A	20	
BAC15		15A	20	
BAC30		30A	10	

Cable Connectors



NORSLO



All damaged cables should be cut through and repaired as if you were joining two cables (insulating tape is not adequate for this purpose). This is achieved with a safety weatherproof cable connector. The H65Z-C is ideal for joining and repairing outdoor cables up to 3 core 2.5mm². And with its IP67 weatherproof rating it can also be temporarily immersed in water. Maximum current 15A.


The Norslo H85Z-C weatherproof plug and socket is ideal for using with appliances that you wish to be able to easily disconnect, such as pond pumps. With a weatherproof rating of IP68 it can be continuously immersed in water. Maximum current 10 Amps.



- Conforms to BS EN 60529, IEC 61984

	PART NO.	DESCRIPTION	DIMENSIONS
	H65Z-C	IP67 Weatherproof Cable Connector (Can be temporarily immersed in water)	Cable ø - max 12.5mm / min 6mm Dimensions - Dia 32mm x L 120mm Weight 60g
	H85Z-C	IP68 Weatherproof Plug & Socket Cable Connector (Can be continuously immersed in water)	Cable ø - max 9mm / min 5mm Dimensions - Dia 40mm x L 140mm Weight 75g

Securely joins cables with a permanent resin.

- For 2, 3 & 4 core cables
- All mechanical joints included
- For PVC, XLPE, EPR & PILC cables
- RoHS compliant
- Water resistant
- Conforms to BS 6910 & CENELEC HD 623S1



PART NO.	DESCRIPTION	SIZE	
CJS1	LV Straight Joints	1.5 - 6mm ²	
CJS2		10 - 16mm ²	
CJS3		25mm ²	
CJS4		35 - 95mm ²	
CJS5		120mm ²	
CJB1	LV Branch Joints	1.5 - 16mm ²	
CJB2		25 - 35mm ²	

Junction Boxes

NORSLO



- Brass terminal
- Urea mouldings
- Heavy duty
- Conforms to BS 6220

	PART NO.	DESCRIPTION	FINISH	PK QTY
	GB2299 GB2299B	Junction Box 4 terminal, 20A 58mm diameter	White Black	10 10
	GB2620 GB2620B	Junction Box 4 terminal, 5A 60mm diameter	White Black	10 10
	GB2621	Junction Box 4 terminal, 20A 75mm diameter	White	10
	GB2622	Junction Box 3 terminal, 30A 75mm diameter	White	10
	GB2619 GB2619B	Heavy Duty Junction Box 3 terminal, 30A 90mm diameter	White Black	10 10
	GB2618 GB2618B	Heavy Duty Junction Box 4 terminal, 20A 90mm diameter	White Black	10 10
	GB2298 GB2298B	Heavy Duty Junction Box 6 terminal, 20A 90mm diameter	White Black	10 10

Heavy duty blocks for use at meter/mains position

- Black urea phenolic
- Easy knockout entries
- Lids can be sealed for security
- 230V AC
- Conforms to BS EN 60695-2-10











PART NO.	DESCRIPTION	INFO	PK QTY	
CB1	Connector Block 100A 25mm ²	Single pole, 5 way	20	
CB2	Capacity 5 cables per pole	Double pole, 2 x 5 way	10	
CB3	Connector Block 100A 35mm ²	Single pole, 5 way	20	
CB6	Capacity 5 cables per pole	Double pole 2 x 5 way	10	
CB9	200A 70mm ² Capacity 6 cables per pole	Single pole, 6 way	1	

	Weight(g)	H (mm)	W (mm)	D (mm)
CB1	132	64	47	38
CB2	290	89	65	55
CB3	188	64	47	38
CB6	493	104	66	67
CB9	585	125	64	55

Compression Cable Lugs



- Manufactured in tinned copper

	PART NO.	DESCRIPTION	STUD SIZE	PK QTY
	CS6/6	Compression Cable Lug Cable Size 6mm	6	50
	CS10/6 CS10/8 CS10/10	Compression Cable Lug Cable Size 10mm	6 8 10	50 50 50
	CS16/6 CS16/8 CS16/10	Compression Cable Lug Cable Size 16mm	6 8 10	50 50 50
	CS25/6 CS25/8 CS25/10	Compression Cable Lug Cable Size 25mm	6 8 10	50 50 50
	CS35/8 CS35/10 CS35/12	Compression Cable Lug Cable Size 35mm	8 10 12	50 50 50
	CS50/8 CS50/12	Compression Cable Lug Cable Size 50mm	8 12	50 50
	CS70/8 CS70/10 CS70/12	Compression Cable Lug Cable Size 70mm	8 10 12	20 20 20
	CS95/10 CS95/12	Compression Cable Lug Cable Size 95mm	10 12	20 20

- Cable size Red 0.5 - 1.5mm
- Blue 1.5 - 2.5mm
- Yellow 4.0 - 6.0mm



PART NO.	DESCRIPTION	STUD SIZE	PK QTY	
RRT4.3 RRT5.3 RRT6.5 RRT8.5	Red Ring Terminals Cable size 0.5mm - 1.5mm	4.3mm 5.3mm 6.5mm 8.5mm	5 x 50 5 x 50 5 x 50 5 x 50	
BRT4.3 BRT5.3 BRT6.5 BRT8.5	Blue Ring Terminals Cable size 1.5mm - 2.5mm	4.3mm 5.3mm 6.5mm 8.5mm	5 x 50 5 x 50 5 x 50 5 x 50	
YRT4.3 YRT5.3 YRT6.5 YRT10	Yellow Ring Terminals Cable size 4.0mm - 6.0mm	4.3mm 5.3mm 6.5mm 10.0mm	5 x 50 5 x 50 5 x 50 5 x 50	
RFT4.3 BFT4.3	Fork Terminals Stud size 4.3mm	Red Blue	5 x 50 5 x 50	
RPOF6.3 BPOF6.3 YPOF6.3	Connectors Push-on Female Stud size 6.3mm	Red Blue Yellow	5 x 50 5 x 50 5 x 50	
RTIPOF6.3 BTIPOF6.3 YTIPOF6.3	Connectors Totally Insulated, Push-on Female Stud size 6.3mm	Red Blue Yellow	5 x 50 5 x 50 5 x 50	

Crimp Terminals & Connectors (Vinyl insulated)

NORSLO



	PART NO.	DESCRIPTION	COLOUR	PK QTY
	RPT9.5	Pin Terminal Stud size 9.5mm	Red	5 x 50
	RPOM6.3 BPOM6.3 YPOM6.3	Connector Push-on Male Stud size 6.3mm	Red Blue Yellow	5 x 50 5 x 50 5 x 50
	RS1.5 BS2.5 YS6	Splice Stud size 1.5mm Stud size 2.5mm Stud size 6.0mm	Red Blue Yellow	5 x 50 5 x 50 5 x 50
	RBM4 BBM5	Bullet Male Stud size 4.0mm Stud size 5.0mm	Red Blue	5 x 50 5 x 50
	RPB6.3 BPB6.3	Piggy back Stud size 6.3mm	Red Blue	5 x 50 5 x 50



PART NO.	DESCRIPTION	TERMINAL HOLE SIZE	PK QTY	
4WEBS	Brass Earthing Block Single pole 4 way	1 x 25mm 3 x 16mm	20	
8WEBS	Brass Earthing Block Single pole 8 way	2 x 25mm 6 x 16mm	20	
4WEB	Brass Earthing Block Double pole 4 way	1 x 25mm 3 x 16mm	20	
8WEB	Brass Earthing Block Double pole 8 way	2 x 25mm 6 x 16mm	20	
NR384E NR584E	Economy Earth Rod	3/8" x 4' non-extend 5/8" 4' extendable	1	
NR384 NR584	Premium Earth Rod	3/8" x 4' non-extend 5/8" 4' extendable	1	
NRC38E NRC38	Lug to Rod Clamp	3/8" economy 3/8" premium	10 10	

Earthing Products

NORSLO



	PART NO.	DESCRIPTION	INFO	PK QTY
	NC38E NC58E NC38 NC58	Cable to Rod Clamp	3/8" economy 5/8" economy 3/8" premium 5/8" premium	10 10 10 10
	RC58 RC58E	Rod Coupling	5/8" coupler 5/8" rod coupling (economy)	10 25
	DS58	Driving Bolt	5/8" driving bolt	10
	PS1/20	Earth Strip Pierced copper	1/2" x 20M	1
	PT205	Earth Inspection Pit SWL 5,000kg made from lightweight polymer	Dimensions H300 x W300 x D212mm	1
	20ET 25ET	Earth Tags	20mm 25mm	100 100
	ECB	Earthing Box PVC	ø 66mm, H60mm	1

The Norslo high performance earth clamp is engineered by GreenBrook to exceed the requirements of BS 951. Independent testing and certification has confirmed this performance. Available in three colours - red for non-corrosive dry atmospheres, blue or green for corrosive or humid conditions. Available in three standard band lengths.

The Norslo Radiator Clamp Kit was specifically designed to allow a convenient and easy method of complying with the current IEE wiring regulations.

- Packs come complete with spanner, clamps and safety labels
- Can be easily used in all earthing applications with wet filled radiators, steel kitchen sinks, ducting, suspended ceilings or any other metal work that offers a 'fin' contact area.



PART NO.	DESCRIPTION	PIPE DIA. (∅)	PK QTY	
EC14GB EC14/2GB EC14/3GB	Earth Clamps for dry conditions Terminal size A-D 2.5 - 10mm ² Max. earth conductor 1 x 10mm ²	12mm - 32mm 32mm - 50mm 50mm - 75mm	20 20 20	
EC15GB EC15/2GB EC15/3GB	Earth Clamps for all conditions Terminal size A-D 2.5 - 10mm ² Max. earth conductor 1 x 10mm ²	12mm - 32mm 32mm - 50mm 50mm - 75mm	20 20 20	
EC16GB EC16/2GB EC16/3GB	Earth Clamps for all conditions Terminal size A-E 2.5 - 16mm ² Max. earth conductor 2 x 10mm ²	12mm - 32mm 32mm - 50mm 50mm - 75mm	20 20 20	
RD10 RD100	Radiator Clamp Kit Complete with clamp, spanner & safety labels	in clam shell in a poly bag (10 poly bags of 10)	10 100	