

VELA *Switch*

- 7.5W LED Fire Rated 'Colour Change' Downlights

- + Certified for 30, 60 & 90 minute fire rated ceilings
- + Switchable colour change - from 3,000K to 4,000K
- + Integrated driver
- + Available with clear or frosted lens
- + Quick connections, Loop in, loop out
- + Additional bezels available - Gold, Matt Black, Satin Chrome & Polished Chrome



VSWITCHC
- Clear Lens

*Improved
Technology*



VSWITCHF
- Frosted Lens

Dimmable

	VSWITCHC	VSWITCHF
Description	Fixed - White with Clear Lens	Fixed - White with Frosted Lens
Barcode	5012739 645983	5012739 645990
Cut Out	73mm	73mm
Dimensions	D85 x H83mm	D85 x H83mm
IP rating	IP65	
Lamp Type	SMD LED	
Beam Angle	70°	95°
Class Type	II	
Colour Temp	3,000K or 4,000K	
Operating Temp	-20°C to +40°C	
Total Lumens	3,000K - 623lm 4,000K - 681lm	3,000K - 622lm 4,000K - 647lm
Useful Luminous Flux	3,000K - 515lm 4,000K - 532lm	3,000K - 519lm 4,000K - 539lm
Energy Class	G	
CRI	>80	
MacAdam Steps	<6	
Wattage	7.5W	
Ballast Type	LED Driver	
Voltage	230V ~ 50Hz	
Product Weight	277g	277g
Life Span	50,000 hours	
Guarantee	3 Years	
Conforms To	BS EN 60598	

VELA *Switch*


- **7.5W** LED Fire Rated 'Colour Change' Downlights

20A Lighting Connectors

- Suitable for use with the 'Vela Range'

+ Time saving products for all your connecting requirements

QUICK Connekt³

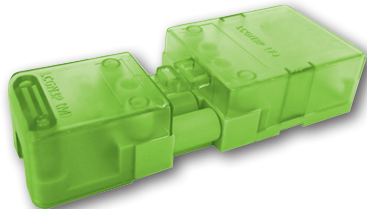

Part No: LCGN3P


QUICK Connekt⁺



Part No: LCGN3PLS
Complete with Quick Click
push-fit terminals

All connectors
sold in
POS display boxes
of 50

QUICK Connekt⁴

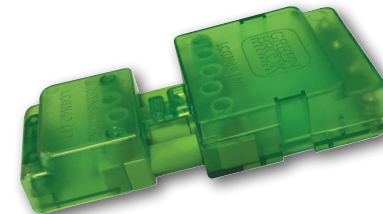

Part No: LCGN4P