



# RCD Panel Mounting Sockets - 30mA Passive

-PowerBreaker-

- + Mechanically latched (does not need resetting after a power loss)
- + Red & Green dual flag system to show power on/off
- + High intensity LED power on indicator
- + Cuts the power for added protection against electrocution
- + K22S-WP has Twin earth terminals

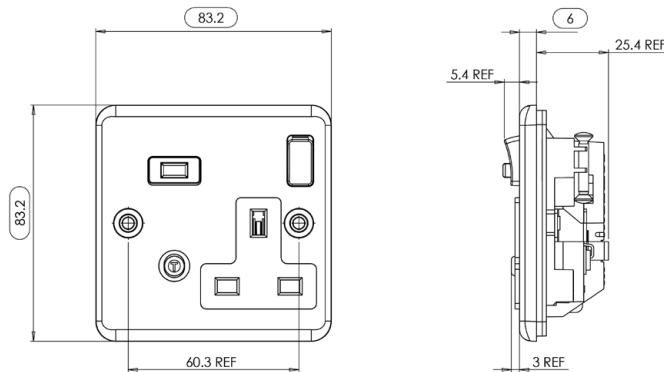

**K21S-WP**

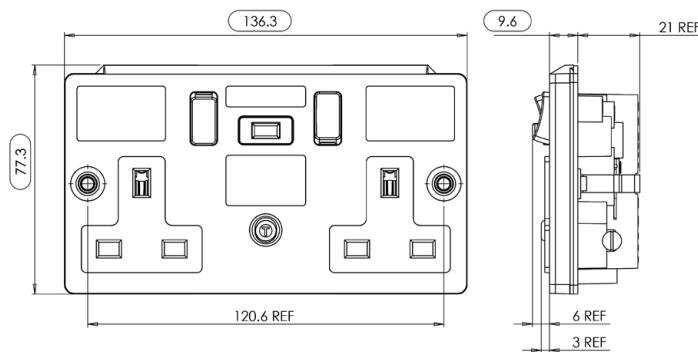

**K22S-WP**

**Type A RCD**  
**BS 7288-2016+A1:2022**

	<b>K21S-WP</b>	<b>K22S-WP</b>
<b>Product Finish</b>	White	
<b>Barcode</b>	5012739646829	5012739646836
<b>Product Weight</b>	130g	191g
<b>Product Dimensions</b>	83.2 x 83.2 x 30.8mm	136.3 x 77.3 x 30.6mm
<b>Voltage</b>	230V AC ~ 50Hz	
<b>Max Operating Current</b>	13A (13A Inductive)	
<b>IP Rating</b>	IP40	
<b>Rated Trip Current</b>	30mA	
<b>Typical Trip Speed</b>	Less than 20mS (typical)	
<b>RCD Contact Break</b>	Double Pole	
<b>Rated Short Circuit Breaking &amp; Making Capacity</b>	250A	
<b>Rated Conditional Short-Circuit Current</b>	1500A Power Factor Range .93 to .98	
<b>Latching</b>	Mechanical - No need to reset after Power Loss (Passive)	
<b>Responsive To</b>	Pulsating DC earth faults	
<b>Terminal Capacities</b>	Upto 3 x 1.5mm <sup>2</sup> / 3 x 2.5mm <sup>2</sup>	
<b>Main Housing Material</b>	Polycarbonate	
<b>Guarantee</b>	3 Years	
<b>Conforms To</b>	BS 7288-2016+A1:2022, BS1363-2:2016+A1:2018	

TECHNICAL DATA SHEET

**GREEN BROOK**

Tel: 01279 772 772

Email: sales@greenbrook.co.uk

www.greenbrook.co.uk

