


# RCD Fused Connection Units - 10mA Passive

# -PowerBreaker-


- + Mechanically latched (does not need resetting after a power loss)
- + Red & Green dual flag system to show power on/off
- + High intensity LED power on indicator
- + Cuts the power for added protection against electrocution
- + Fused for all fixed electrical appliances



**Type A RCD**  
**BS 7288-2016+A1:2022**  
**10mA**

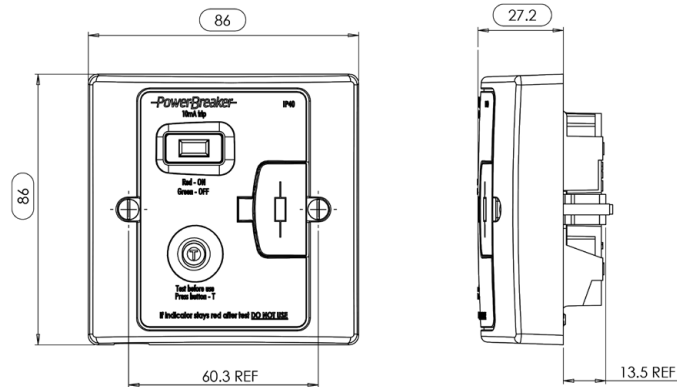

**H92-WP10**

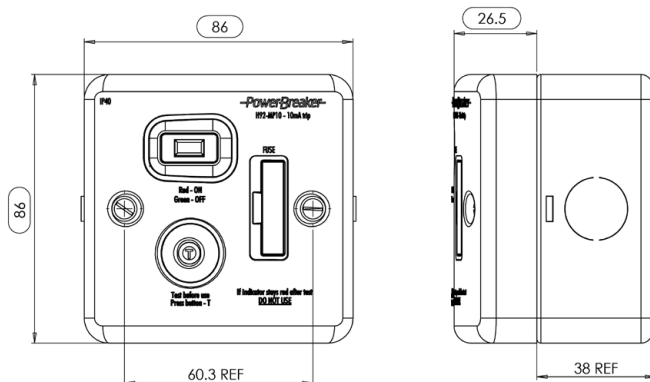

**H92-MP10**

	<b>H92-WP10</b>	<b>H92-MP10</b>
<b>Product Finish</b>	White	Metalclad
<b>Barcode</b>	5012739646935	5012739646942
<b>Product Weight</b>	195g	392g
<b>Product Dimensions</b>	86 x 86 x 27.2mm	86 x 86 x 26.5mm
<b>Voltage</b>	230V AC ~ 50Hz	
<b>Max Operating Current</b>	13A (13A Inductive)	
<b>IP Rating</b>	IP40	
<b>Rated Trip Current</b>	10mA	
<b>Typical Trip Speed</b>	Less than 20mS (typical)	
<b>RCD Contact Break</b>	Double Pole	
<b>Terminal Capacity</b>	6mm <sup>2</sup> max	
<b>Rated Short Circuit Breaking &amp; Making Capacity</b>	250A	
<b>Rated Conditional Short-Circuit Current</b>	1500A Power Factor Range .93 to .98	
<b>Latching</b>	Mechanical - No need to reset after Power Loss (Passive)	
<b>Responsive To</b>	Pulsating DC earth faults	
<b>Terminal Capacities</b>	Upto 3 x 1.5mm <sup>2</sup> / 3 x 2.5mm <sup>2</sup>	
<b>Main Housing Material</b>	Urea	Steel & Polycarbonate
<b>Cord Anchorage</b>	Cable Dia: 4.6mm - 10.4mm Cable Size - 0.5mm <sup>2</sup> to 1.5mm <sup>2</sup>	
<b>Guarantee</b>	3 Years	
<b>Conforms To</b>	BS 7288-2016+A1:2022, BS1363-4:2016+A1:2018	

**TECHNICAL DATA SHEET**

**GREEN BROOK**

Tel: 01279 772 772

Email: sales@greenbrook.co.uk

www.greenbrook.co.uk

