


Installation & Operating Instructions
For Alfresco Floodlight with PIR
Part Nos: LEDAF36 and Louvre Front LEDAF38

## **IMPORTANT**


This product should be installed by a competent person and in accordance with the current IET Wiring Regulations.

If in doubt, consult a qualified electrician.

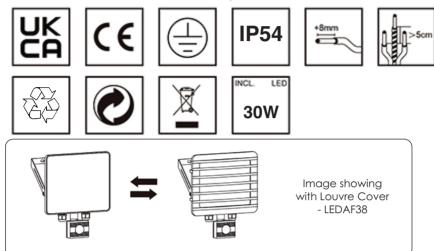



## **INSTALLATION & OPERATION**


## Single Floodlight Installation

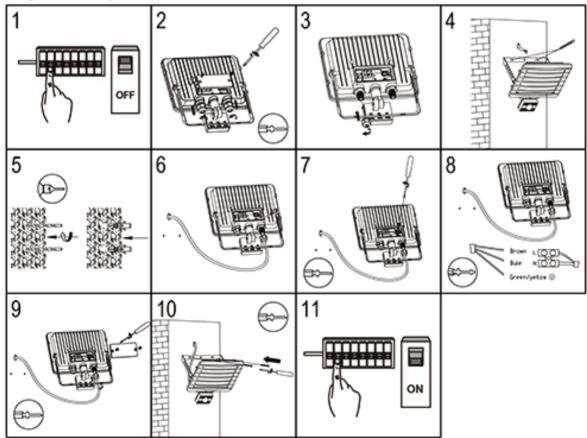


## **Group Floodlight Installation**

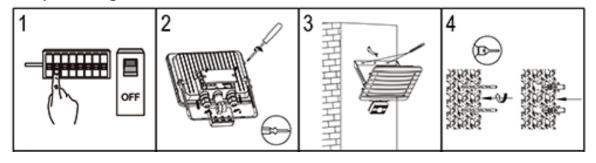


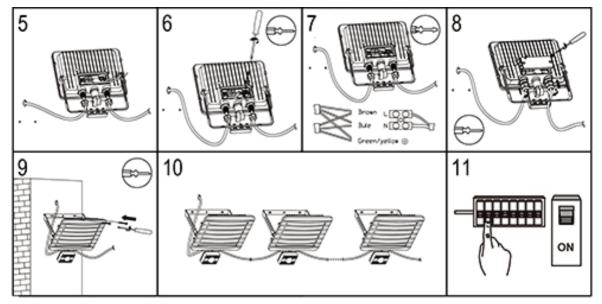






TECHNICAL INFORMATION	
Rated voltage:	230 - 240V AC ~ 50/60Hz
Wattage:	30W
Lumens:	2700
IP Rating:	IP54
Colour Temperature:	5,000K
Class Type:	Class 1
No of LED's:	42
CRI:	80
Detection Distance:	0 - 12 metres
Tine Delay:	10 secs min to 10 mins max
Mount Height:	2.5 metres
Housing:	Heavy duty Aluminium body & clear glass diffuser
Conforms To:	BS EN 60598





GUARANTEE

Your GreenBrook Alfresco Fitting is guaranteed for 5 years from the date of purchase. This is in addition to your statutory rights.

Please keep these instructions for future reference.

**INSTALLER** - Please pass instruction manual onto the owner of the unit.

