


IP20 4W LED EMERGENCY EXIT BOX - Maintained

- + Ultra slim modern design
- + With angle adjustable down light
- + Facility for remote switching
- + Supplied with arrow up legend (see below for full legend part no's)
- + Other options available - Self test & Black finish
- + Emergency operation duration 3 hours
- + Emergency operation selectable duration 1H /3H /8H



CLIFFEXITBOXUP
Black Frame Option - Special Order

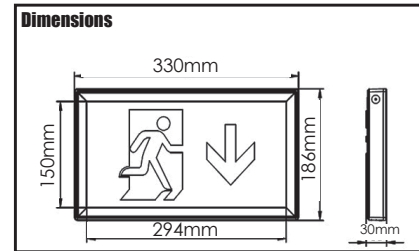

CLIFFEXITBOXUP



CLIFFLEGDOWN
Down Arrow Legend



CLIFFLELEFT
Left Arrow Legend



CLIFFLEGRIGHT
Right Arrow Legend

Note: Legends are not reversible.

CLIFFEXITBOXUP	
Description	Led Exit Box supplied with 'Up' legend
Barcode	5012739654831
Voltage	220-240V ~ 50.60Hz
Emergency Power	<4W
Luminaire Lumens & Emergency Lumens	10 lumens (legend) 80 lumens (downward light)
Emergency Duration	3 Hours (1 & 8 hours duration selectable)
IP Rating	IP20
Viewing Distance	30M
Class Type	II
Colour Temperature	6500K
Ambient Temperature	5°C - 45°C
Function	Maintained
Battery Type	LiFePO4 3.2V 1.5Ah
Dimensions (mm)	L330 x W186 x D30mm
Beam Angle	55°
Mounting Type	Wall Mounting
Material	Polycarbonate
RAL Colour	RAL 9003
Product Weight	760g
Guarantee	3 Years
Conforms To	BS EN 60598-2-22:2014+A1 BS EN IEC 60598-1:2021 BS EN 62471:2008 BS EN 62493:2015